

WELDOBOX - WELDOTEND

PROTECTIVE CURTAIN AND BOX



USE

- Demarcated areas and boxes for welding and grinding
- Protection against UV and IR rays that develop during welding
- Protection from grinding operations with sparks and dust generation

FEATURES

- Reinforced eyelets for sliding rings
- Easy assembly through quick buttons
- Welding protection according to DIN EN 1598:2011-12
- Protection of grinding processes
- Risk factor <1
- High resistance to fire
- Spectral transmission factor between 210-313 nm: max. 0.002%
- Spectral transmission factor between 313-400 nm: <3%
- Light transmission factor: > 0.0001%
- Wavelength danger level 400 - 1400 nm: R <1

OPTIONAL


- Height of different curtains
- Different sizes of boxes and walls
- Suction systems (suction wall, suction arm)
- Curtains available in green color
- Upper cover

TECHNICAL DATA

MODEL	A mm	B mm
WELDOBOX/2/3	2000	3000
WELDOBOX/3/3	3000	3000
WELDOBOX/4/3	4000	3000
WELDOBOX/4/4	4000	4000
WELDOBOX/4/5	4000	5000
WELDOBOX/5/5	5000	5000
WELDOTEND/2	/	2000
WELDOTEND/3	/	3000
WELDOTEND/4	/	4000
WELDOTEND/5	/	5000

Boxes and walls with different sizes are available on request

REALIZZAZIONI

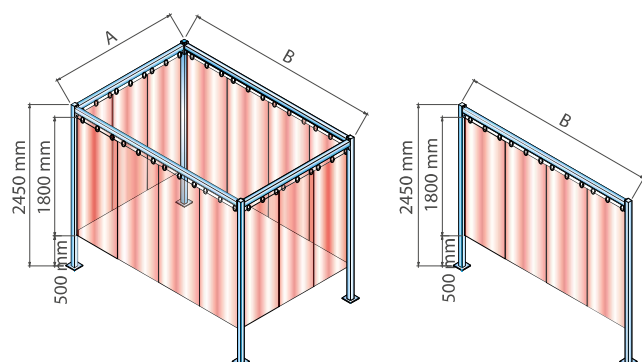



USE

- Suitable to support curtains for the separation of environments, especially welding and grinding
- Box closing for washing and greasing of vehicles
- Delimitation of areas for painting
- Closing temporary work areas in workshops

FEATURES

- 8 and 11 meters long models
- Construction in painted steel sheet
- Support details in galvanized steel
- Pivoting arm fixed to the wall with 180° rotation
- Positioning handle
- Tensioner to be fixed on the opposite wall
- Curtain (optional)


TECHNICAL DATA

MODEL	Ø CABLE mm	WORKLOAD Kg	LENGHT m	WEIGHT Kg
T-REEL/08	3	5	8	7
T-REEL/11	3	9	11	7


OPTIONAL

- **[TEND 13/18]** Welding and grinding protection curtain, 1300 mm x ht. 1800 mm
- **[TEND 13/20]** Welding and grinding protection curtain, 1300 mm x ht. 2000 mm

OPERATING

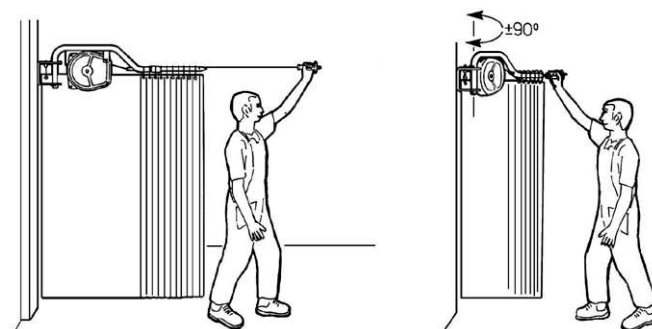

DIMENSIONS

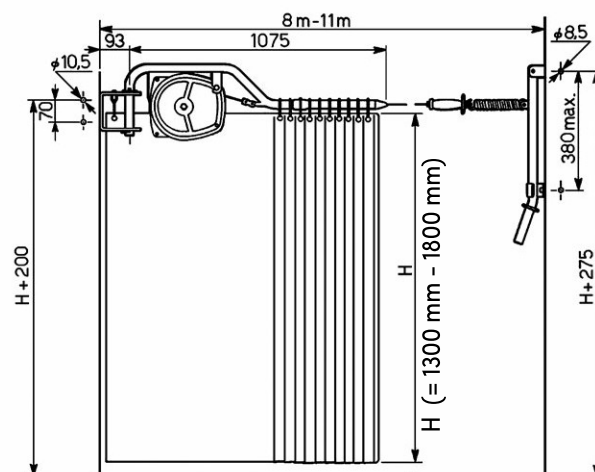

PRODUCTIONS

