



USE

- Cabin for suction and abatement of fine and light dust
- Sanding processes

FEATURES




- Made of press-folded galvanized sheet metal
- Pleated cartridges in antistatic aluminised polyester
- Cartridge cleaning system with compressed air jets and timer
- Removable dust collection drawers

STANDARD SUPPLY

- Centrifugal extractor
- Aluminized polyester cartridges
- Dust collection drawers
- IP55 control panel and IP65 wired lighting fixtures
- Emergency button
- Compressed air timed filter cleaning system

TECHNICAL DATA

MODEL	MAX FLOW RATE m ³ /h	POWER kW	CARTRIDGES n	CARTRIDGES DIMENSIONS mm	FILTERING SURFACE m ²	LAMPS n (58 W)	WEIGHT Kg	DIMENSIONS A x B x H
ZD2	7000	2,2	4	Ø 330 mm L= 1000 mm	52	2	480	2000 x 2450 x 3180
ZD3	10000	4,0	5	Ø 330 mm L= 1000 mm	65	2	600	3000 x 3450 x 3250
ZD4	14000	2 x 2,2	6	Ø 330 mm L= 1000 mm	78	2	740	4000 x 4450 x 3300
ZD5	20000	2 x 4,0	8	Ø 330 mm L= 1000 mm	104	4	990	5000 x 5450 x 3180

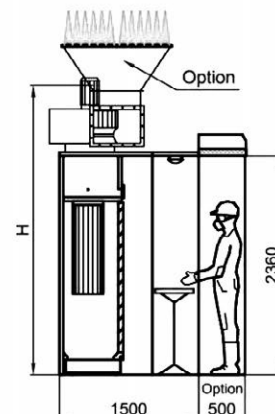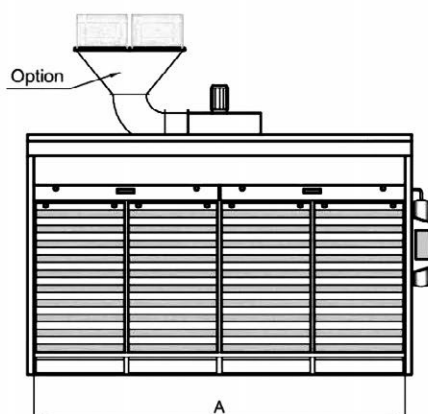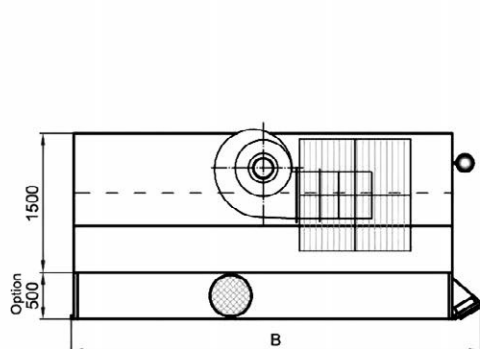

OPTIONAL

- Activated carbon filter
- ATEX extractor
- Inverter extractor

DETAILS



Aluminized polyester cartridges



Removable dust collection drawers

PRODUCTIONS





USE

- Suction and abatement of fine and light dust
- Sanding processes
- Ideal for mobile workstations

FEATURES

- Made of press-folded galvanized sheet metal
- Pleated cartridges in antistatic aluminised polyester
- Cleaning cartridges with compressed air jets (optional timer)
- Removable dust collection drawers


STANDARD SUPPLY

- Non-sparking centrifugal fan
- Slatted suction walls
- Aluminized polyester cartridges
- Dust collection drawers
- IP55 electrical panel with hour meter
- Wheels
- Compressed air filter cleaning system

DETAILS



Aluminized polyester cartridges




Removable dust collection drawers

OPTIONAL

- Timed filter cleaning systems
- Atex II 3GD extractor
- Inverter extractor
- Final bag filter, class G4, for reintegration into the environment

COMPONENTS

1. Slatted suction walls
2. Pleated cartridges in antistatic aluminised polyester
3. Removable collection drawers
4. Non-sparking centrifugal aspirator
5. Electromotor
6. Section change
7. IP55 electrical panel with integrated emergency button
8. Compressed air tank
9. Wheels
10. Hopper (optional)
11. Pocket filter class G4 or higher (optional)

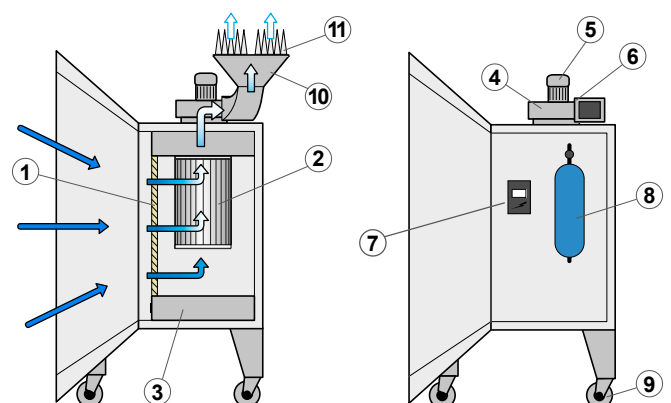

TECHNICAL DATA

MODEL	MAX FLOW RATE m ³ /h	POWER kW	CARTRIDGES n	CARTRIDGES DIMENSIONS mm	FILTERING SURFACE m ²	Ø OUTLET PIPE mm	WEIGHT Kg	DIMENSIONS A x B x H
ZDR2	5000	1,5	4	0 325 mm L= 600 mm	31	400	380	2200 x 1250 x 2500
ZDR25	7000	2,2	4	0 325 mm L= 700 mm	34	450	485	2700 x 1250 x 2580
ZDR3	8000	2,2	4	0 325 mm L= 700 mm	43	450	570	3200 x 1250 x 2580

